



# Free Floating Lever Drain Traps

For Loads to 42,000 lb/hr (19,050 kg/hr)...Pressures to 1,000 psig (69 bar)

Armstrong's forged steel, free floating lever drain traps use the same bodies, caps, lever mechanisms, valves and seats of Armstrong inverted bucket steam traps that have been proven in years of service. Elliptical floats and high leverage make it possible to open large orifices to provide adequate capacity for drain trap size and weight.

The hemispherical valve, seat and leverage of the 32-LD, 33-LD and 36-LD forged steel traps are identical in design, materials and workmanship to those for saturated steam service up to 1,000 psig (69 bar) with the exception of the addition of a guidepost to assure a positive, leaktight valve closing under all conditions.

For a fully detailed certified drawing, refer to CD #1035.

## List of Materials

| Table LD-21. |                 |                 |       |                        |                          |
|--------------|-----------------|-----------------|-------|------------------------|--------------------------|
| Model No.    | Valve & Seat    | Leverage System | Float | Body & Cap             | Gasket                   |
| 32-LD        | Stainless Steel |                 |       | Forged Steel ASTM A105 | Compressed Asbestos-free |
| 33-LD        |                 |                 |       |                        |                          |
| 36-LD        |                 |                 |       |                        |                          |

For information on special materials, consult the Armstrong Application Engineering Department.

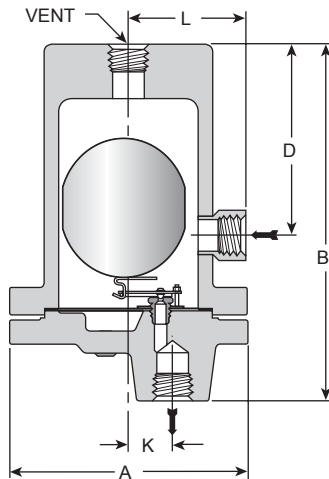


Figure LD-37.

No. 32-LD, 33-LD and 36-LD forged steel guided lever drain trap. Socketweld or flanged connections are also available.



## Physical Data

| Table LD-22. Armstrong Guided Lever Liquid Drain Traps |   |            |   |            |          |        |
|--|---|------------|---|------------|----------|--------|
| Model No.  | Forged Steel  |            |   |            |          |        |
|  | 32-LD†  |            | 33-LD†  |            | 36-LD†   |        |
| Pipe Connections                                       | in  | mm         | in  | mm         | in       | mm     |
| "A"  | 1/2, 3/4, 1   | 15, 20, 25 | 1/2, 3/4, 1   | 15, 20, 25 | 1-1/2, 2 | 40, 50 |
| "B"  | 6-3/4   | 171        | 8   | 203        | 11-7/8   | 302    |
| "D"  | 10-3/16   | 259        | 11-9/16   | 294        | 17-1/8   | 435    |
| "K"  | 5-9/16  | 141        | 6-1/16  | 154        | 9        | 229    |
| "L"  | 1-1/4   | 32         | 1-7/16  | 37         | 2-1/8    | 54     |
|  | 3-3/8   | 86         | 3-9/16  | 90         | 6-1/16   | 154    |
| Approx. Wt. lbs (kg)                                   | 31 (14)   |            | 49 (22)   |            | 163 (74) |        |
| Max. Allowable Pressure (Vessel Design)                | 600 psig @ 100°F (41 bar @ 38°C)<br>500 psig @ 750°F (35 bar @ 400°C) |            | 1,000 psig @ 100°F (69 bar @ 38°C)<br>600 psig @ 750°F (41 bar @ 400°C) |            |          |        |

Note: Vessel design pressure may exceed float collapse pressure in some cases. Pipe size of vent connection is same as that of inlet and outlet connections. \*1/2" (15 mm) outlet. \*\*No side connection.

\*last updated 11/15