



Pegler Yorkshire

# GATE VALVE

TYPE 1068




Forged brass full bore gate valve  
BS 5154 PN20 series B, female ends AB



### LS KEYS


- 1/2", 3/4" K9 Lockshield Key 850139
- 1" K2 Lockshield Key 817020
- 1 1/4" K3 Lockshield Key 850132
- 1 1/2" K5 Lockshield Key 850134
- 2" K6 Lockshield Key 850135

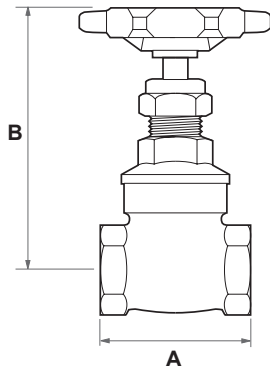

### Pressure Equipment Directive Category

Sizes								
1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
SEP	SEP	SEP	SEP	SEP	SEP	SEP	SEP	SEP

### Pressure & Temperature Ratings

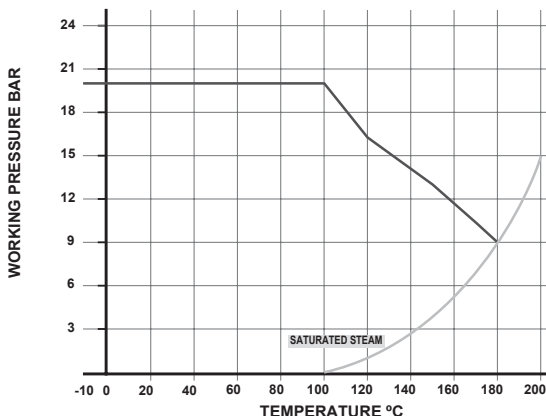

### Sizes

#### Taper / Parallel and American (NPT) Taper Thread

Range	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
IS07-1Rc (Taper)	203007	203008	203009	203010	203011	203012	203013	203014	203015
IS07-1Rp (PT)	203047	203048	203049	203050	203051	203052	203053	203054	
ANSI NPT (AT)	203027	203028	203029	203030	203031	203032	203033	203034	203035
IS07-1Rc (Lockshield -Taper)	203067	203068	203069	203070	203071	203072			

### Dimensions (mm)

Range	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A Face to Face	52	56	65	73	76	90	102	114	134
B Height	85	95	110	125	146	170	205	240	290
Weight kg	0.32	0.46	0.69	1.03	1.40	2.28	3.68	5.42	10.59

### Flow Rates\* m<sup>3</sup>/h

Range	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Cv	16.4	37.4	66.7	105.3	150.9	269.1	500.8	795.6	1273.0
Kv	14.0	32.0	57.0	90.0	129.0	230.0	428.0	680.0	1088.0

\*Cv - flow rate in US GPM at a pressure drop of 1 psi. \*Kv - flow rate in m<sup>3</sup> per hour at a pressure drop of 1 bar.

### Valve Suitability

Steam	Water	Oil	Air	Gas Inert	Gas Combustible	Gas Corrosive	Gas Oxygen
X	✓	✓	X	X	X	X	X

### Material Specification

Component	Material
Body	Forged brass (1/4" to 2") Gravity die cast brass (2 1/2" to 4")
Bonnet	Forged brass (1/4" to 3") Gravity die cast brass (4")
Stem	Brass bar
Wedge	Forged brass (1/4" to 2") Gravity die cast brass (3 & 4")
Stem ring	Brass bar
Gland	Brass bar
Gland nut	Brass bar (1/4" to 1") Forged brass (1 1/4" to 4")
Handwheel	Aluminium
Handwheel nut	Brass bar
Gland packing	PTFE
Rating disc	Aluminium
Lockshield	Brass bar

### Maximum Pressure Conditions

Size	Maximum Pressure Conditions (bar)		Test Pressures (bar)	
	(Cold working) Temperatures up to 100°C	(Hot working) Temperatures up to 180°C	Shell	Seat
1/2" to 4"	20.0	9.0	30.0	22.0
Size	Maximum Pressure Conditions (psi)		Test Pressures (psi)	
	Temperatures up to 212°F	Temperatures up to 356°F	Shell	Seat
1/2" to 4"	290.1	130.5	435.1	319.1

Temperature range - 10°C + 180°C (non shock)

\*last updated 03/16



**ALPHA GROUP**  
Steam & Fluid Control Solution

139 Soi Nuanchan 34, Nuanchan Road, Nuanchan, Buengkum, Bangkok 10230  
Tel : 02 792 9333 Fax : 02 946 1755-6 Email : sales@alphagroup.co.th www.alphagroup.co.th